

TUMBLE DRYERS

WHEN INVESTING MEANS SAVING

DD11 GOLD
DD16 GOLD

FEATURES

- Construction in grey skinplate, stainless steel look.
- Big loading door (opening of 180°).
- Direct drive through a gearbox, no pulley.
- ENERGY SAVINGS: Air recovery system for great energy efficiency.
- CARE DRY: The intelligent humidity sensor offers a precise control of the moisture in the linen. By this system the drying cycle will automatically stop when it reaches the set level of residual moisture.
- INSULATED PANELS & DOUBLE DOOR GLASS: The complete circuit of the air-flow has been thermally insulated in order to optimize the energy to heat the air and to maximize the energy efficiency. Double doorglass.
- OPTIMAL FLOW: The range of GOLD dryers complements the axial-radial air flow with side and front openings to increase and optimize the airflow circuit, achieving the most efficient drying conditions.
- SPRINKLER: Integrated Fire Extinguishing System.
- ELECTRONIC CONTROL: Easy and intuitive to use, the electronic control offers a complete control of the process.
- REVERSING DRUM: All models offer the reverse turning of the drum.
- STAINLESS STEEL DRUM standard.
- GENTLE DRY: The new drum with stamped holes makes sure the linen is gently handled.
- New filter drawer with wide surface and improved airflow.
- Cool Down: Anti-wrinkle at the end of cycle.
- Models available in electric, gas or steam heating.



OPTIONS

- Stainless steel body.
- Stainless steel front panel.
- Low pressure steam battery.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



Air recylé



Contrôle de l'humidité
et réglage automatique
du tambour



Carrosserie isolée



Double flux
Axial & Radial




Système
anti-feu



Hublot
double vitrage

TECHNICAL DATA	UNIT.	DD11 GOLD	DD16 GOLD		
CAPACITY					
Capacity 1/18	Kg	12	18		
Capacity 1/20	Kg	11	17		
Hourly Output GOLD	Kg/h	27	43		
Evaporation capacity GOLD	l/h	14,17	22,4		
DRUM					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	976	976		
Load hole bottom height	mm	689	689		
Drum length	mm	475	746		
Drum volume	l	210	330		
POWER					
Drum motor power	Kw	0,25	0,25		
Fan Motor Power GOLD	Kw	0,55	0,55		
Total Installed power GOLD	Kw	12,85	18,85		
Electric Heating (Installed power)	Kw	12	18		
Gas heating (installed Power) in KW	Kw	20,51	20,51		
Gas heating (installed el. power) GOLD	Kw	0,85	0,85		
Steam heating (Steam Power KW)	Kw	30	30		
Steam heating (installed el. power) GOLD	Kw	0,85	0,85		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + T	N° x mm2 / A	3 x 35 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 10 / 40A	4 x 1,5 / 20A	4 x 16 / 63A	4 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 4 / 25A	5 x 1,5 / 20A	5 x 10 / 32A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		3/4"	
Ø Condensed (Steam models)	BSP	3/4"		3/4"	
DIMENSIONS / PACKING DIMENSIONS					
Width / Width	mm	785 / 865		785 / 865	
Depth / Depth	mm	840 / 940		1.110 / 1.210	
Height / Height	mm	1.694 / 1.840		1.694 / 1.840	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	172 / 180		187 / 200	
OTHERS					
Max airflow GOLD	m3/h	1.200		1.200	
Ø Fume exhaust	mm	200		200	
Sound level GOLD	dB	64		64	

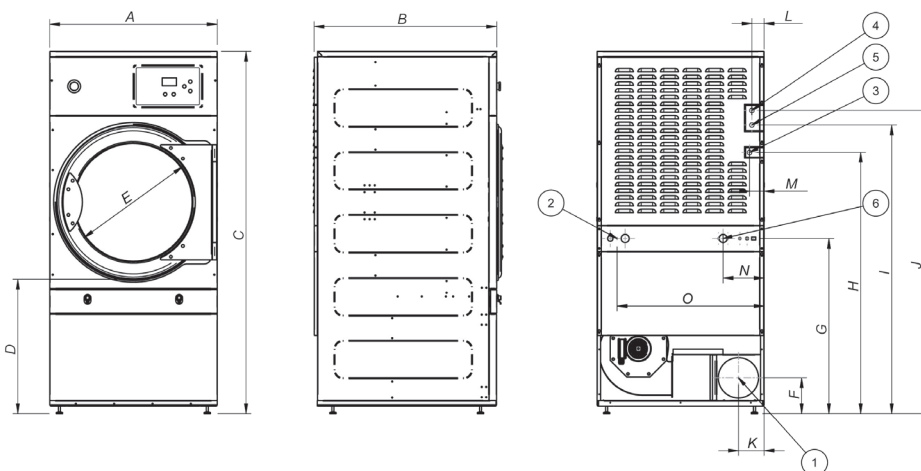

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
DD11	785	840	1.700	618	574	168	821	1.226	1.354	1.422	121	56	68	192	690
DD16	785	1.010	1.700	618	574	168	821	1.226	1.354	1.422	121	56	68	192	690