



#### EASY TOUCH 2

User friendly and totally programmable 7" ET2  
USB Connection. PC software free of charge for  
programming, traceability, data analysis...  
Videos on display (ads, instructions)  
37 languages  
8 dosing signals as standard



#### G FACTOR

High G-Factor:  
G-FACTOR 450 (for WED-45/60) and G-FACTOR  
350 (for WED-120)



#### EFFICIENCY

Intelligent consumption  
Optimal loading  
Water Recovery tanks ready: AQUABAC  
Low water consumption



#### VERSATILITY

Electric < > Hot water  
Wet cleaning features



#### CONNECTIVITY

Remote technical service  
Management of laundries: OPL  
Remote payment



#### ERGONOMICS

Biggest door diameters: Ø 560 mm (for WED-45/60)  
and Ø 700 mm (for WED-120)  
Easy opening/closing system for door lock



#### MAINTENANCE

Equivalent parts for all models: contactors,  
electronic devices, gear  
Technical menu: traceability, error diagnosis



#### OTHERS

Grey skinplate outer casing (inox for WED-120)  
Drum and tub in stainless steel AISI 304  
Detergent dispenser with 5 compartments  
Electronic control of imbalance with frequency control  
LOADING AID feature: water and rotation control  
CE and WRAS approved product. Option ETL




## OPTIONS

- Double drain
- Normally closed valve for WED-45/60
- Tilting options: frontal or double tilt
- Water inlet hose (for WED-45/60)
- Weighing system: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- Danube Online communication
- Reversible door opening (for WED-45/60)
- Tropicalized model: protected board
- Kit to transform an E or HW heated machine into steam version (for WED-45/60)
- Double heating E + S (for WED-45/60)
- Panel to cover feet for WED-45/60
- Stainless steel AISI 304 outer casing (for WED-45/60)
- Stainless steel AISI 304 front panel (for WED-45/60)
- Maritime voltage for electric models: 440V III 50/60 Hz  
No neutral
- Voltage 230V III 50/60 Hz

TECHNICAL DATA	UNIT.	WED-45 ET2	WED-60 ET2	WED-120 ET2		
<b>DRUM</b>						
Load capacity 1:9 / 1:10	Kg	50/45	67/60	133/120		
Volume	l	450	600	1.200		
Diameter	mm	918	1.048	1.360		
Depth	mm	720	684	840		
<b>GENERAL DETAILS</b>						
Washing speed / Spinning speed	r.p.m.	42,5 / 934	38 / 875	34 / 678		
G Factor	-	450	450	350		
Maximum force transmitted	KN	11,23 ±3,15	12,95 ±4,2	37,77 ±5,25		
Frequency-dynamic force	Hz	14,1	12,66	11,33		
Noise level	dB	<70	<70	<70		
Coin laundry version	-	No	No	No		
Double drain	-	Opt	Opt	Opt		
Weighing System / Tilting System	-	Opt/Opt	Opt/Opt	Opt/Opt		
<b>DOOR</b>						
Height door center / Height door base	mm	1.190/830	1.190/830	1.330/900		
Diameter	mm	560	560	700		
<b>POWER</b>						
Motor	kW	7,5	11	15		
Electric heating power	kW	28,8	36	-		
Total electric power (electric model)	kW	31,3	40	-		
Total electric power (hw, steam mod.)	kW	7,5	11	15		
<b>CONNECTIONS</b>		<b>ELECTRIC</b>	<b>STEAM / HOT WATER</b>	<b>ELECTRIC</b>	<b>STEAM / HOT WATER</b>	<b>STEAM / HOT WATER</b>
Tension 230V - III + T	Nº x mm2 / A	3 x 25 / 80A	3 x 4 / 20A	3 x 25 / 100A	3 x 6 / 32A	3 x 10 / 40A
Tension 400V - III + N + T	Nº x mm2 / A	3 x 10 / 50A	3 x 2,5 / 10A	3 x 16 / 63A	3 x 4 / 10A	3 x 4 / 16A
Steam inlet (Steam model)	inch	3/4"		3/4"		1-1/4"
Maximum steam consumption (Steam model)	Kg/h	19		21		26,5
Water inlet	inch	1"		1"		1-1/2"
Water main pressure	Kgs/cm <sup>2</sup>	2-4		2-4		2-4
Maximum water consumption**	Lit/h	473		633		1.254
Drain	inch	3"		3"		4"
Drainage capacity	Lit/min	200		200		500
<b>DIMENSIONS / PACKING DIMENSIONS</b>						
Net Width / Gross Width	mm	1.478/1.540		1.478/1.540		1.836/1.900
Net Depth / Gross Depth	mm	1.444/1.580		1.444/1.580		1.863/1.940
Net Height / Gross Height	mm	1.945/1.970		1.945/1.970		2.245/2.290
Net weight / Gross weight	kg	1.350/1.420		1.400/1.520		3.950/4.100
Volume	m <sup>3</sup>	4,79		4,70		8,44

\* N°2 Program, 100% load

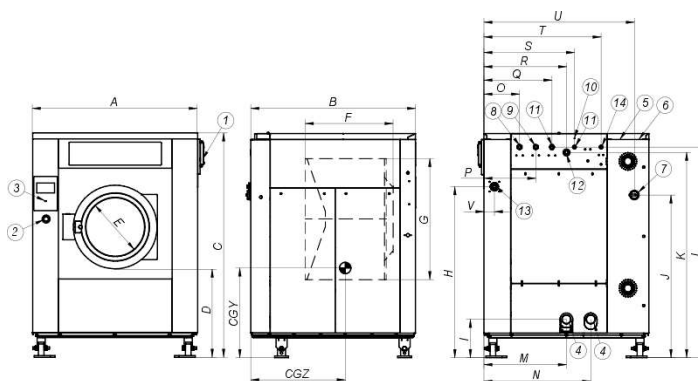

- 1 SOAP DISPENSER
- 2 EMERGENCY STOP
- 3 USB PORT
- 4 DRAIN
- 5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6 ELECTRICAL CONNECTION
- 7 MAIN SWITCH
- 8 AUXILIAR WATER INLET
- 9 HOT WATER INLET
- 10 EQUIPOTENTIAL CONNECTION
- 11 COLD WATER INLET
- 12 BLUR OUTPUT / WATER OVERLOAD
- 13 LIQUID SOAP CONNECTION
- 14 STEAM CONNECTION

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	CGY	CGZ
WED-45	1.427	1.426	1.945	747	560	760	920	1.484	333	1.411	1.780	1.827	714	924	309	449	589	715	784	1.014	1.302	93	625	943
WED-60	1.427	1.426	1.945	747	560	760	1.050	1.484	333	1.411	1.780	1.827	714	924	309	449	589	715	784	1.014	1.302	93	644	972
WED-120	1.780	1.775	2.245	900	700	960	1.360	1.745	336	1.520	1.989	2.115	684	1.100	450	590	730	910	950	1.195	1.628	251	853	1.104